



---

User Manual

Wallee Payment Acquirer Plugin v15.0

---



## Table of Contents

1. Introduction .....	3
2. Features .....	3
3. Screenshots .....	4
4. Wallee Multi-website Multi-space Backend configuration .....	8
5. Brief description .....	9
6. Technical Requirements / Compatible With: .....	11
7. Changes Log / Release Notes .....	11
8. Support.....	11

## 1. Introduction

The Wallee Extension from PIT Solutions is a connector between Wallee and Odoo Web Shop. It is a standardized way to accept payments via a multitude of different payment providers around the world. It is a single payment gateway to send payments to Adyen, Braintree, Ingenico, Heidelpay, PostFinance, Concardis, FirstData, Datatrans, Worldline, Barclaycard, etc. Beside the payment processing, Wallee offers a wide range of additional features, like reconciliation. This extension connects Odoo Shop users to the payment hub, which has more than 50 payment gateways and processors linked to it. The connector works with the help of the Rest APIs. This reduces the tendency of customers to abandon their cart when their preferred payment gateway is missing on the payment page. It also connects the user to the different payment service provider APIs, thereby lowering the cost of using payment routing.


## 2. Features

- Version: 15.0
- Easy to install.
- Flexible.
- User-friendly and configurable as per one's requirements.
- Multiple payment methods.
- Maintain Transaction.
- Customizable system notifications.
- Supports I-frame, Lightbox and Redirection mode for payment page.
- Supports multi-website and multi-space configurations.
- Support payment gateways such as PayPal, Bank Transfer, MasterCard, Online banking, Skrill, Alipay, SOFORT Banking, Invoice, Post finance.
- Support payment processors such as Braintree, PostFinance, Barclaycard, Alipay Global, Datatrans, Concardis.


### 3. Screenshots

#### Odoo backend configuration

Screenshot 1: Odoo Backend configuration - Credentials

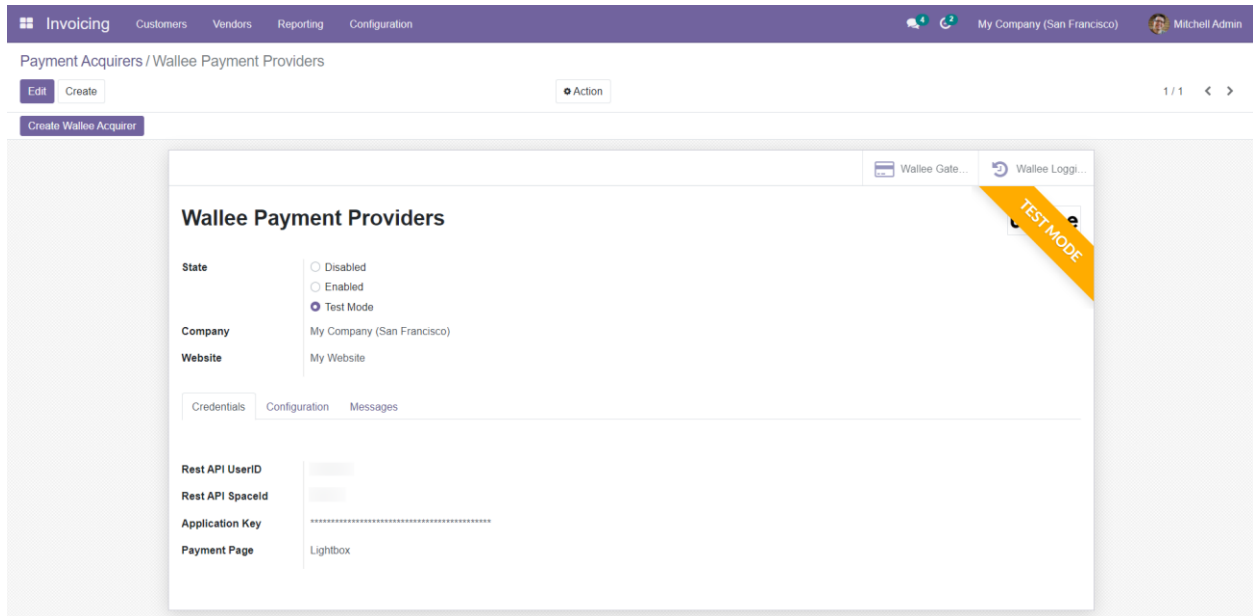


Screenshot 2: Odoo Backend configuration

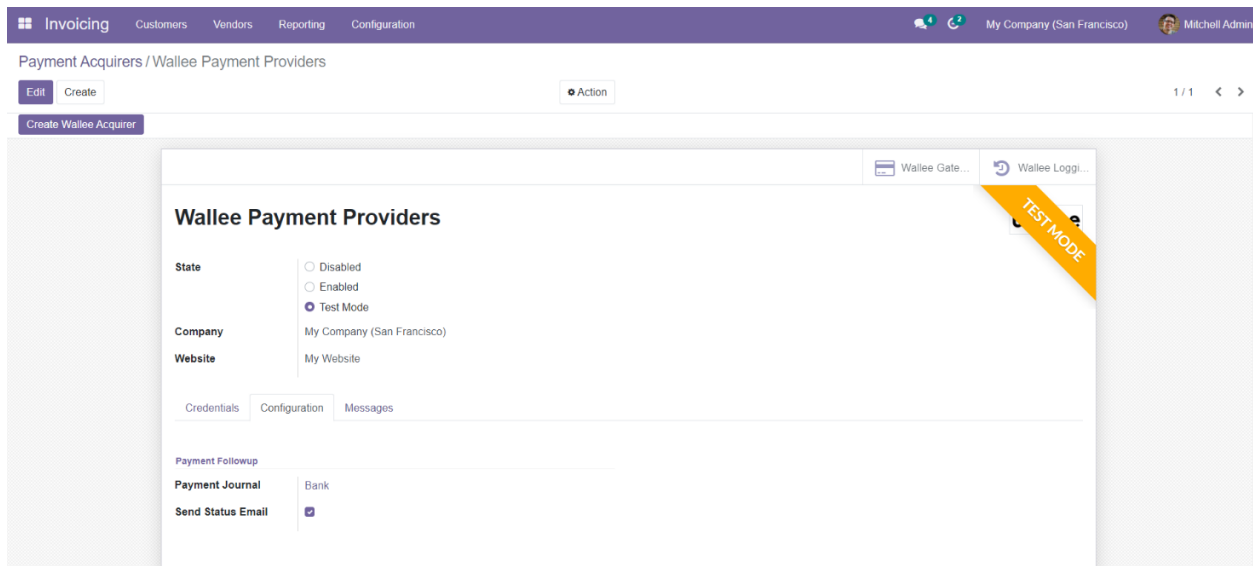


The Wallee Extension can be configured by specifying the details required:

1. Rest API UserID: Application User ID created from app-wallee.com
2. Rest API SpaceID: Space ID created from the app -wallee.com
3. Application Key: Application Key generated from app-wallee.com

*Screenshot 3: Multiple payment methods*

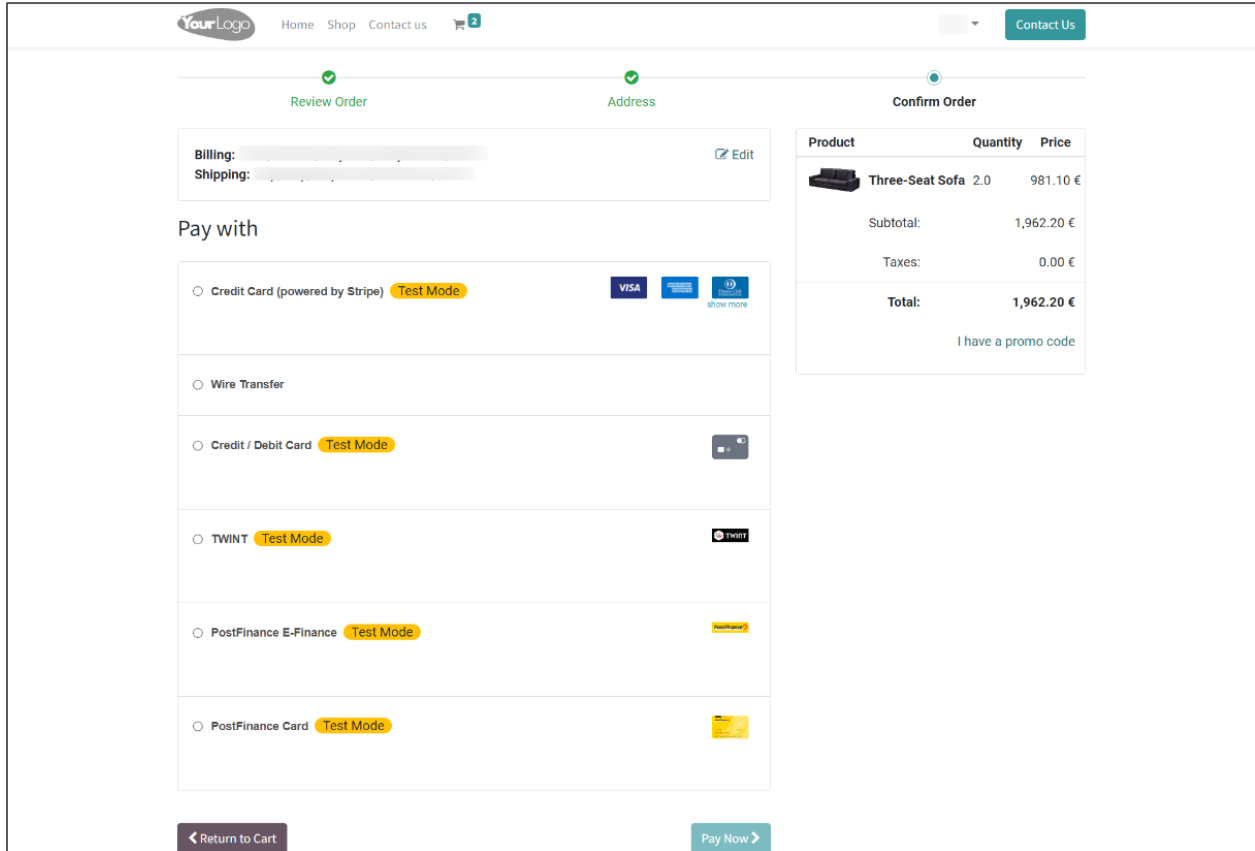


The screenshot displays a checkout page with a navigation bar at the top containing 'YourLogo', 'Home', 'Shop', 'Contact us', and a shopping cart icon with a '2' notification. A 'Contact Us' button is located in the top right. The main content area is divided into three sections: 'Review Order', 'Address', and 'Confirm Order'. The 'Review Order' section shows 'Billing:' and 'Shipping:' fields with an 'Edit' link. The 'Address' section is currently empty. The 'Confirm Order' section contains a table with the following data:


Product	Quantity	Price
 Three-Seat Sofa	2.0	981.10 €
Subtotal:		1,962.20 €
Taxes:		0.00 €
<b>Total:</b>		<b>1,962.20 €</b>

Below the table, there is a link that says 'I have a promo code'. The 'Pay with' section lists several payment methods, each with a radio button and a 'Test Mode' label: 'Credit Card (powered by Stripe)', 'Wire Transfer', 'Credit / Debit Card', 'TWINT', 'PostFinance E-Finance', and 'PostFinance Card'. Each method also includes a small icon representing the payment provider. At the bottom of the page, there are two buttons: 'Return to Cart' and 'Pay Now'.

Screenshot 4: I-Frame Payment Processing

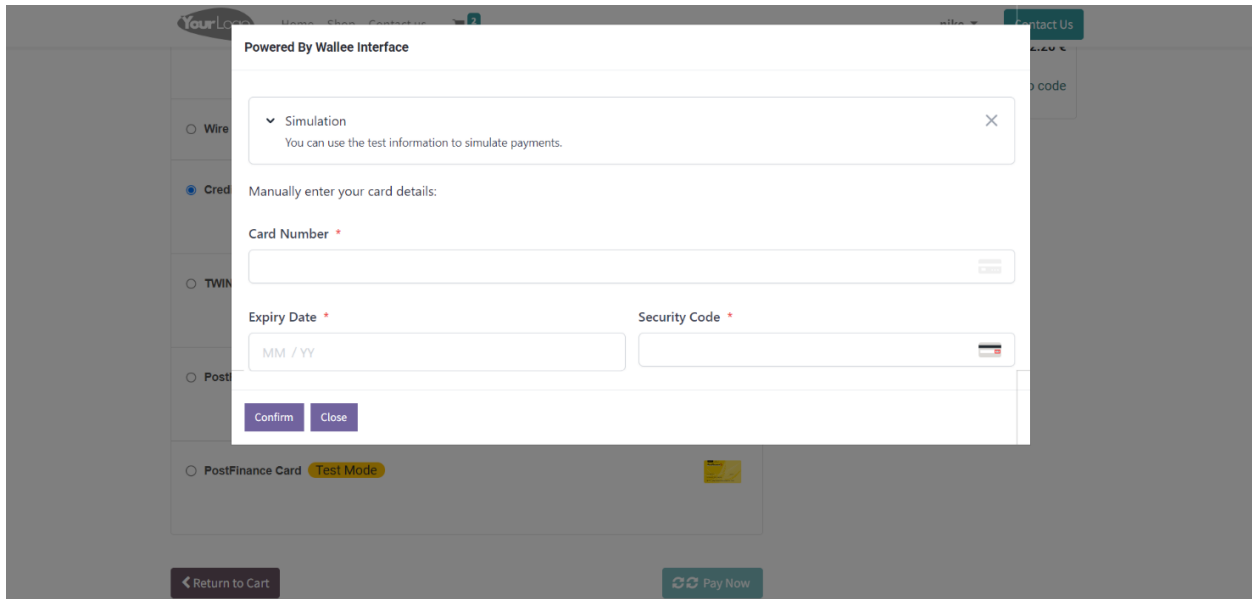

Screenshot 5: Lightbox Payment Processing

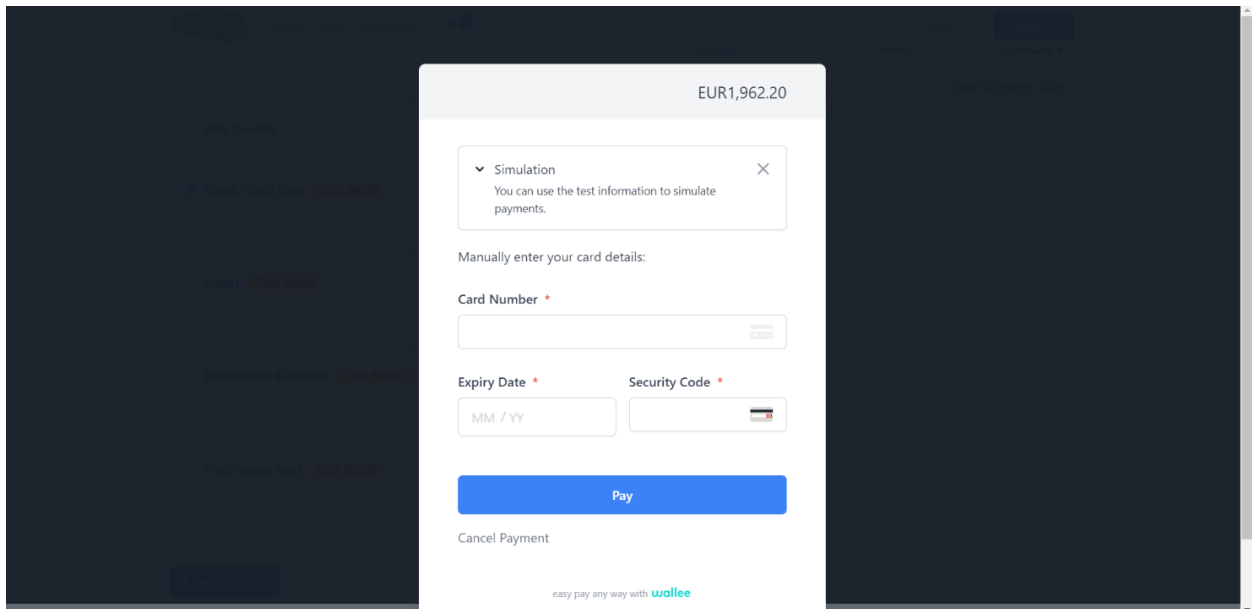

Screenshot 6: Order Confirmation

Order **S00065** Confirmed  
Thank you for your order. [Print](#)

**Payment Information:**

Wallee Payment Providers	Total: 1,962.20 €
--------------------------	-------------------

Your payment has been successfully processed. Thank you!

Billing :   
Shipping:

Product	Quantity	Price
Three-Seat Sofa	2.0	981.10 €
Subtotal:		1,962.20 €
Taxes:		0.00 €
<b>Total:</b>		<b>1,962.20 €</b>

Useful Links: [Home](#), [About us](#), [Products](#), [Services](#), [Legal](#), [Contact us](#)

About us: We are a team of passionate people whose goal is to improve everyone's life through disruptive products. We build great products to solve your business problems.

Our products are designed for small to medium size companies willing to optimize their performance.

Connect with us: [Contact us](#), [info@yourcompany.example.com](mailto:info@yourcompany.example.com), +1 (650) 555-0111

Powered by [odoo](#) - The #1 Open Source eCommerce

Screenshot 7: Order Cancelled

Order **S00066**

**Payment Information:**

Wallee Payment Providers	Total: \$ 23.00
--------------------------	-----------------

Your payment has been cancelled.

Billing :   
Shipping:

Product	Quantity	Price
Warranty (1 year)	1.0	\$ 20.00
Subtotal:		\$ 20.00
Taxes:		\$ 3.00
<b>Total:</b>		<b>\$ 23.00</b>

Useful Links: [Home](#), [About us](#), [Products](#), [Services](#), [Legal](#), [Contact us](#)

About us: We are a team of passionate people whose goal is to improve everyone's life through disruptive products. We build great products to solve your business problems.


Our products are designed for small to medium size companies willing to optimize their performance.

Connect with us: [Contact us](#), [info@yourcompany.example.com](mailto:info@yourcompany.example.com), +1 (650) 555-0111

Powered by [odoo](#) - The #1 Open Source eCommerce


## 4. Wallee Multi-website Multi-space Backend configuration

Screenshot 8: Creating new Wallee acquirer

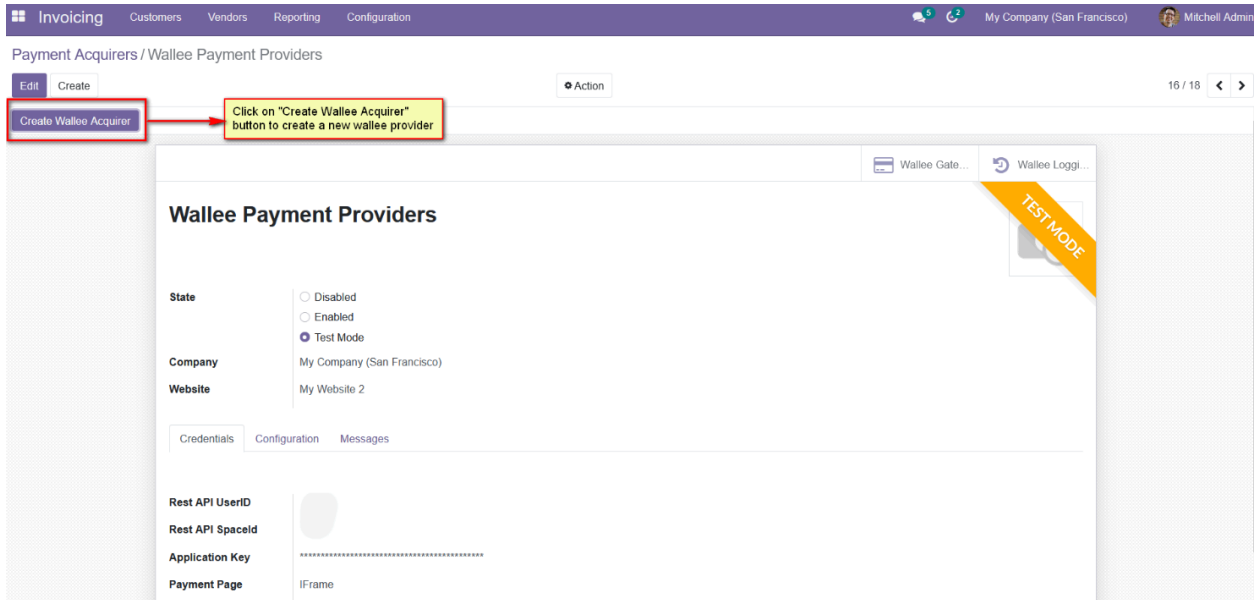

For multi-website configuration, need to create multiple Wallee payment acquirers using the 'Create Wallee Acquirer' button.


Screenshot 9: Mapping website to Wallee acquirer

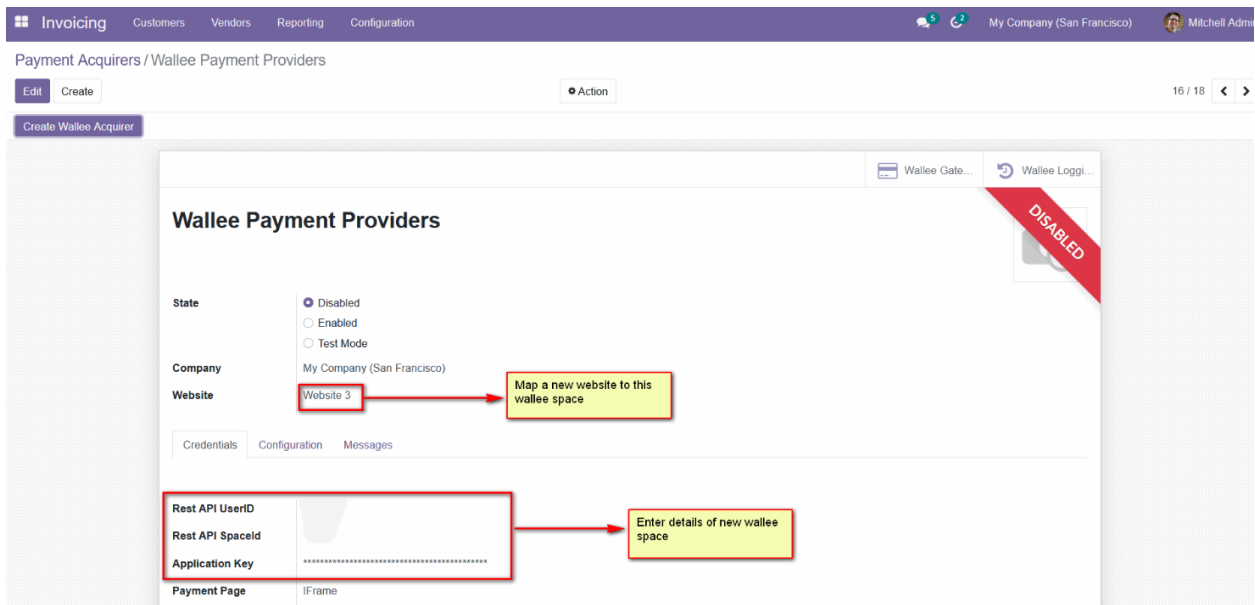



After creating the Wallee payment acquirer, map the respective website and add the Wallee credentials.

### Screenshot 10: Mapping domain to websites

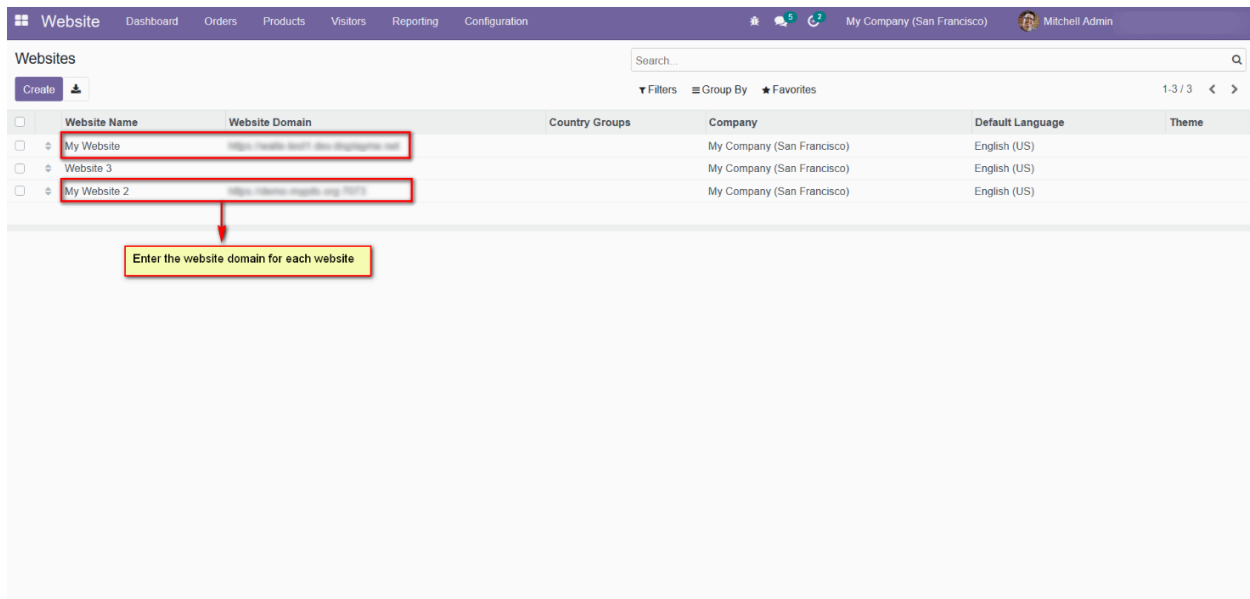

For multi-website functioning, it is necessary to set the domain for the websites.

## 5. Brief description

The Wallee back-end provides a configuration wherein one can define the payment methods to be enabled for users. In addition to this, admin has the flexibility to specify that for the payment completion process, the user should be redirected to the service provider site or handled within the shop site as an I-frame. It depends on the payment service provider whether the gateway can be handled via redirection, I-frame, or both.

For an additional security level in the payment process, Admin can enable the 3D secure functionality in the Wallee back-end. If enabled, then during the checkout process, the user would be directed to the 3D secure service of the payment method, and the details would be handled there.

Admin can change the notification contents in the back end for cases when the payment is pending, completed, or cancelled. Other system notifications are a help message when the Help option is used and a thanks message on completion of the order placement.

Similarly, order emails, invoices, reminders, packing slips, and many more can be edited as per one's format.

### **Initial step-by-step description**

Step 1: Install the module Wallee Payment Acquirer Plugin.

Step 2: Goto invoicing module.

Step 3: Add the Wallee credentials (Rest API UserID, Rest API SpaceID, Application Key) in the Wallee payment provider record in the Odoo backend configuration.

Step 4: Go to Ecommerce website -> Add products to cart -> Proceed to checkout.

Step 5: Choose Wallee payment method and pay now.

Step 6: Complete the transaction by filling out necessary details in Wallee Payment Page.

Step 7: For multi-website backend configuration, first create new Wallee acquirer from the create Wallee acquirer button.

Step 8: After creating the Wallee payment acquirer, map the respective website and add the Wallee credentials.

Step 9: For multi-website functioning, it is necessary to set the domain for the websites.

## 6. Technical Requirements / Compatible With:

- Technical Requirements: Odoo Sales, Payment and Website Module.
- Compatible with: Odoo 15.0.

## 7. Changes Log / Release Notes

Version 1.0.2: October 2024

- Fixed Wallee I-frame payment interface language issue

Version 1.0.1: Aug 2024

- Added multi-website with multi-space configuration feature

Version 1.0.0: Jan 2022

- Initial version

## 8. Support

If you have questions, use our contact form at [webshopextension.com](https://webshopextension.com) or email at [support@webshopextension.com](mailto:support@webshopextension.com).